



DATA SHEET

SEMICONDUCTOR

1N5985B~1N6025B

500 mW DO-35 Hermetically Sealed Glass Zener Voltage Regulators



Maximum Ratings (Note 1)

Rating	Symbol	Value	Unit
Maximum Steady State Power Dissipation @ $T_L \leq 75^\circ\text{C}$, Lead Length = 3/8"	P_D	500	mW
Derate Above 75°C		4.0	mW/ $^\circ\text{C}$
Operating and Storage Temperature Range	T_J, T_{stg}	-65 to +200	$^\circ\text{C}$


1. Some part number series have lower JEDEC registered ratings.



AXIAL LEAD
DO35

Specification Features

- Zener Voltage Range = 2.4 V to 110 V
- ESD Rating of Class 3 (>16 KV) per Human Body Model
- DO-35 Package (DO-204AH)
- Double Slug Type Construction
- Metallurgical Bonding

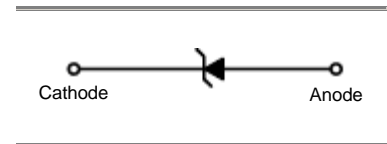

Mechanical Characteristics

Case : Double slug type, hermetically sealed glass

Finish : All external surfaces are corrosion resistant and leads are readily solderable.


Polarity : Cathode indicated by polarity band

Mounting: Any

Maximum Lead Temperature for Soldering Purposes

230 $^\circ\text{C}$, 1/16" from the case for 10 seconds

MARKING DIAGRAM

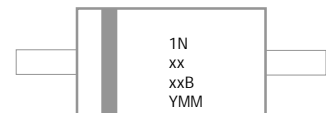


1NxxxxB = Device Code
 Y = Year
 MM = Month

1N5985B~1N6025B

ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ unless otherwise noted. $V_F = 1.5\text{ V Max @ } I_F = 100\text{mA}$ for all types)

Symbol	Parameter
V_Z	Reverse Zener Voltage @ I_{ZT}
I_{ZT}	Reverse Zener Current
Z_{ZT}	Maximum Zener Impedance @ I_{ZT}
I_{ZK}	Reverse Zener Current
I_R	Reverse Leakage Current @ V_R
V_R	Reverse Voltage
I_F	Forward Current
V_F	Forward Voltage @ I_F
I_{ZM}	Maximum DC Zener Current

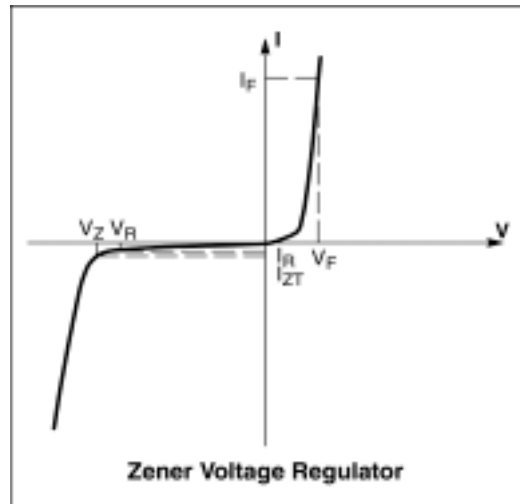

ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ unless otherwise noted, $V_F = 1.5\text{ V Max @ } I_F = 100\text{mA}$ for all types)

Device (Note 2.)	Device Marking	Zener Voltage (Note 3.)				Zener Impedance (Note 4.)			Leakage Current		I_{ZM} (Note 5.)
		V_Z (Volts)			@ I_{ZT}	Z_{ZT} @ I_{ZT}	Z_{ZK} @ I_{ZK}		I_R @ V_R		
		Min	Nom	Max	(mA)	(Ω)	(Ω)	(mA)	(μA)	(Volts)	(mA)
1N5985B	1N5985B	2.28	2.4	2.52	5	100	1800	0.25	100	1	208
1N5986B	1N5986B	2.565	2.7	2.835	5	100	1900	0.25	75	1	185
1N5987B	1N5987B	2.85	3	3.15	5	95	2000	0.25	50	1	167
1N5988B	1N5988B	3.135	3.3	3.465	5	95	2200	0.25	25	1	152
1N5989B	1N5989B	3.42	3.6	3.78	5	90	2300	0.25	15	1	139
1N5990B	1N5990B	3.705	3.9	4.095	5	90	2400	0.25	10	1	128
1N5991B	1N5991B	4.085	4.3	4.515	5	88	2500	0.25	5	1	116
1N5992B	1N5992B	4.465	4.7	4.935	5	70	2200	0.25	3	1.5	106
1N5993B	1N5993B	4.845	5.1	5.355	5	50	2050	0.25	2	2	98
1N5994B	1N5994B	5.32	5.6	5.88	5	25	1800	0.25	2	3	89
1N5995B	1N5995B	5.89	6.2	6.51	5	10	1300	0.25	1	4	81
1N5996B	1N5996B	6.46	6.8	7.14	5	8	750	0.25	1	5.2	74
1N5997B	1N5997B	7.125	7.5	7.875	5	7	600	0.25	0.5	6	67
1N5998B	1N5998B	7.79	8.2	8.61	5	7	600	0.25	0.5	6.5	61
1N5999B	1N5999B	8.645	9.1	9.555	5	10	600	0.25	0.1	7	55
1N6000B	1N6000B	9.5	10	10.5	5	15	600	0.25	0.1	8	50
1N6001B	1N6001B	10.45	11	11.55	5	18	600	0.25	0.1	8.4	45
1N6002B	1N6002B	11.4	12	12.6	5	22	600	0.25	0.1	9.1	42
1N6003B	1N6003B	12.35	13	13.65	5	25	600	0.25	0.1	9.9	38
1N6004B	1N6004B	14.25	15	15.75	5	32	600	0.25	0.1	11	33

2. TOLERANCE AND TYPE NUMBER DESIGNATION (V_Z)

The type numbers listed have a standard tolerance on the nominal zener voltage of $\pm 5\%$.

3. ZENER VOLTAGE (V_Z) MEASUREMENT

Nominal zener voltage is measured with the device junction in the thermal equilibrium at the lead temperature (T_L) at $30^\circ\text{C} \pm 1^\circ\text{C}$ and $3/8"$ lead length.

4. ZENER IMPEDANCE (Z_Z) DERIVATION

Z_{ZT} and Z_{ZK} are measured by dividing the AC voltage drop across the device by the AC current applied. The specified limits are for $I_{Z(AC)} = 0.1 I_{Z(DC)}$ with AC frequency = 60Hz.

5. MAXIMUM ZENER CURRENT RATINGS (I_{ZM})

This data was calculated using nominal voltages. The maximum current handling capability on a worst case basis is limited by the actual zener voltage at the operation point and the power derating curve.

1N5985B~1N6025B

ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ unless otherwise noted, $V_F = 1.5\text{ V Max}$ @ $I_F = 100\text{mA}$ for all types)

Device (Note 6.)	Device Marking	Zener Voltage (Note 7.)				Zener Impedance (Note 8.)			Leakage Current		I_{ZM} (Note 9.)
		V_Z (Volts)			@ I_{ZT}	Z_{ZT} @ I_{ZT}	Z_{ZK} @ I_{ZK}		I_R @ V_R		
		Min	Nom	Max	(mA)	(Ω)	(Ω)	(mA)	(μA)	(Volts)	(mA)
1N6005B	1N6005B	15.2	16	16.8	5	36	600	0.25	0.1	12	31
1N6006B	1N6006B	17.1	18	18.9	5	42	600	0.25	0.1	14	28
1N6007B	1N6007B	19	20	21	5	48	600	0.25	0.1	15	25
1N6008B	1N6008B	20.9	22	23.1	5	55	600	0.25	0.1	17	23
1N6009B	1N6009B	22.8	24	25.2	5	62	600	0.25	0.1	18	21
1N6010B	1N6010B	25.65	27	28.35	5	70	600	0.25	0.1	21	19
1N6011B	1N6011B	28.5	30	31.5	5	78	600	0.25	0.1	23	17
1N6012B	1N6012B	31.35	33	34.65	5	88	700	0.25	0.1	25	15
1N6013B	1N6013B	34.2	36	37.8	5	95	700	0.25	0.1	27	14
1N6014B	1N6014B	37.05	39	40.95	2	130	800	0.25	0.1	30	13
1N6015B	1N6015B	40.85	43	45.15	2	150	900	0.25	0.1	33	12
1N6016B	1N6016B	44.65	47	49.35	2	170	1000	0.25	0.1	36	11
1N6017B	1N6017B	48.45	51	53.55	2	180	1300	0.25	0.1	39	9.8
1N6018B	1N6018B	53.2	56	58.8	2	200	1400	0.25	0.1	43	8.9
1N6019B	1N6019B	58.9	62	65.1	2	225	1400	0.25	0.1	47	8
1N6020B	1N6020B	64.6	68	71.4	2	240	1600	0.25	0.1	52	7.4
1N6021B	1N6021B	71.25	75	78.75	2	265	1700	0.25	0.1	56	6.7
1N6022B	1N6022B	77.9	82	86.1	2	280	2000	0.25	0.1	62	6.1
1N6023B	1N6023B	86.45	91	95.55	2	300	2300	0.25	0.1	69	5.5
1N6024B	1N6024B	95	100	105	1	500	2600	0.25	0.1	76	5
1N6025B	1N6025B	104.5	110	115.5	1	650	3000	0.25	0.1	84	4.5

6. TOLERANCE AND TYPE NUMBER DESIGNATION (V_Z)

The type numbers listed have a standard tolerance on the nominal zener voltage of $\pm 5\%$.

7. ZENER VOLTAGE (V_Z) MEASUREMENT

Nominal zener voltage is measured with the device junction in the thermal equilibrium at the lead temperature (T_L) at $30^\circ\text{C} \pm 1^\circ\text{C}$ and $3/8"$ lead length.

8. ZENER IMPEDANCE (Z_Z) DERIVATION

Z_{ZT} and Z_{ZK} are measured by dividing the AC voltage drop across the device by the AC current applied. The specified limits are for $I_{Z(AC)} = 0.1 I_{Z(DC)}$ with AC frequency = 60Hz.

9. MAXIMUM ZENER CURRENT RATINGS (I_{ZM})

This data was calculated using nominal voltages. The maximum current handling capability on a worst case basis is limited by the actual zener voltage at the operation point and the power derating curve.

DEVICE CHARACTERISTICS

1N5985B~1N6025B

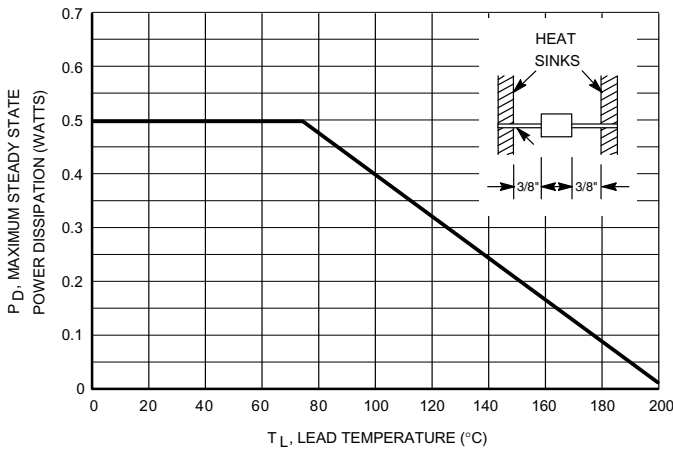


Figure 1. Steady State Power Derating

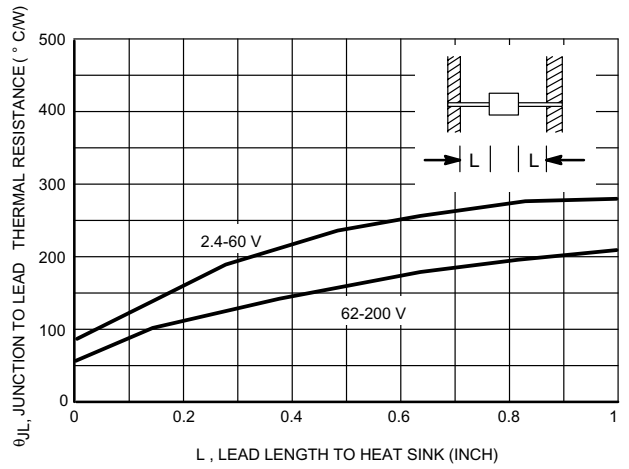


Figure 2. Typical Thermal Resistance

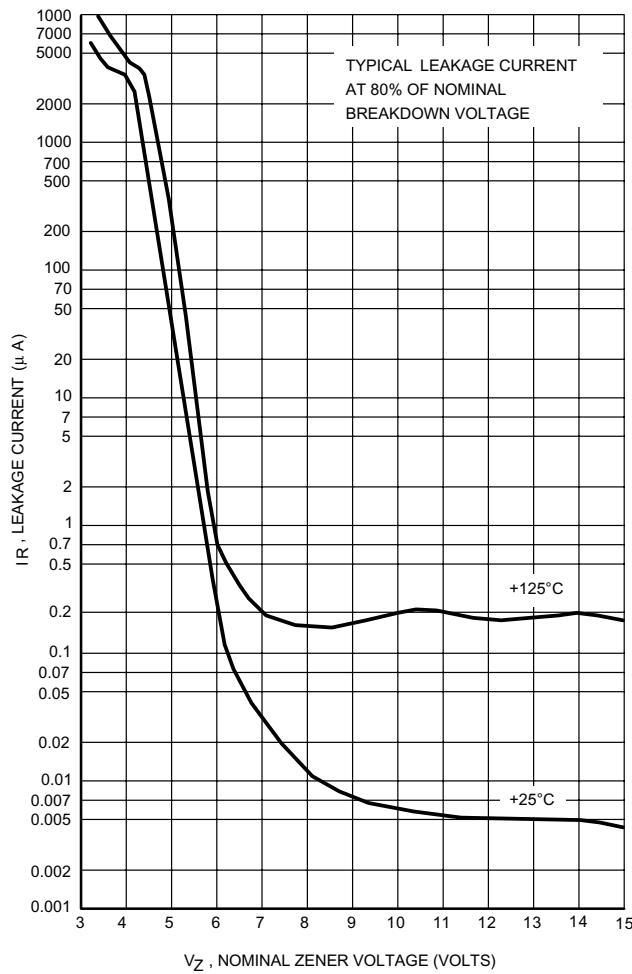


Figure 3. Typical Leakage Current

DEVICE CHARACTERISTICS

1N5985B~1N6025B

TEMPERATURE COEFFICIENTS

(-55°C to +150°C temperature range; 90% of the units are in the ranges indicated.)

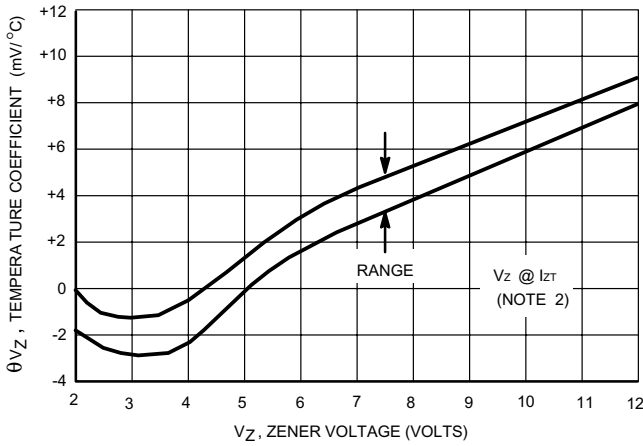


Figure 4a. Range for Units to 12 Volts

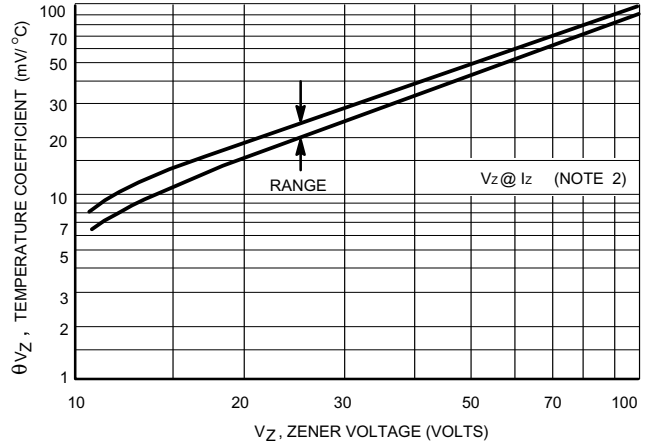


Figure 4b. Range for Units 12 to 100 Volts

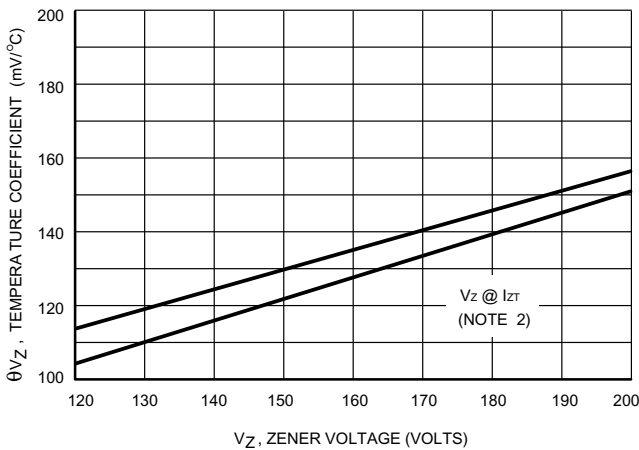


Figure 4c. Range for Units 120 to 200 Volts

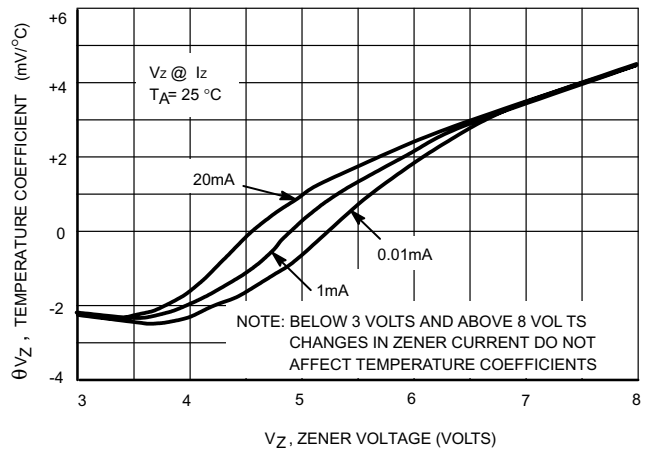


Figure 5. Effect of Zener Current

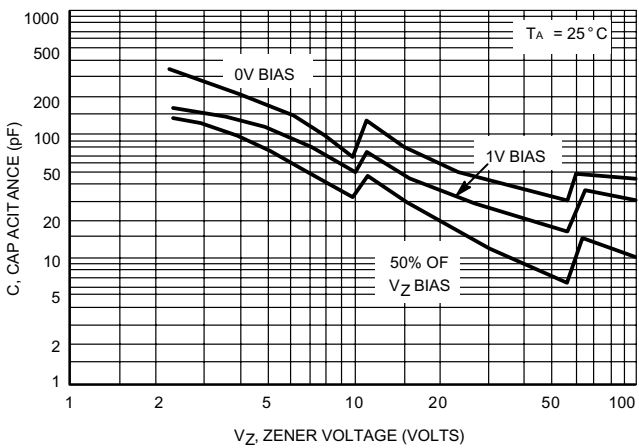


Figure 6a. Typical Capacitance 2.4-100 Volts

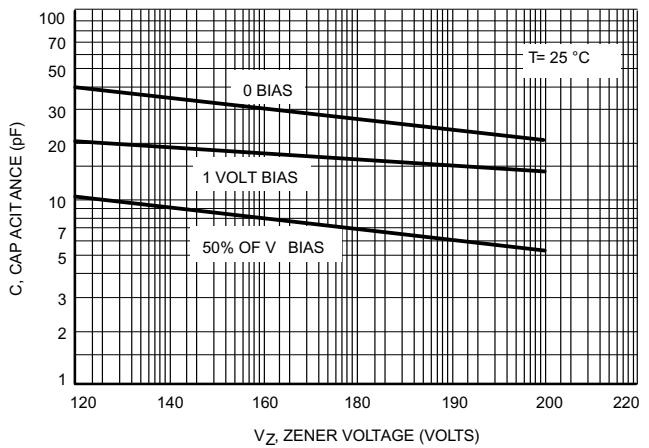


Figure 6b. Typical Capacitance 120-200 Volts

DEVICE CHARACTERISTICS

1N5985B~1N6025B

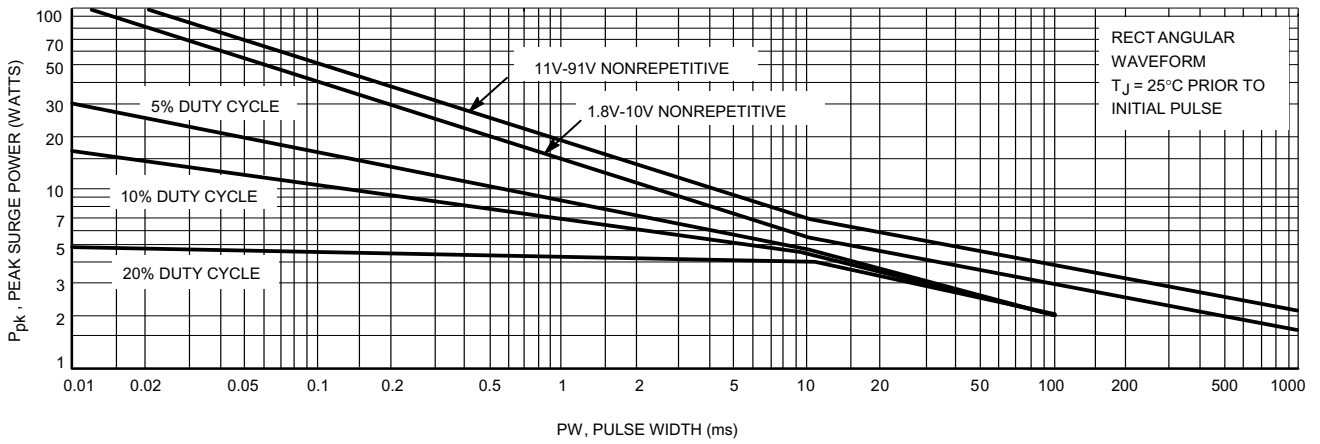


Figure 7a. Maximum Surge Power 1.8-91 Volts

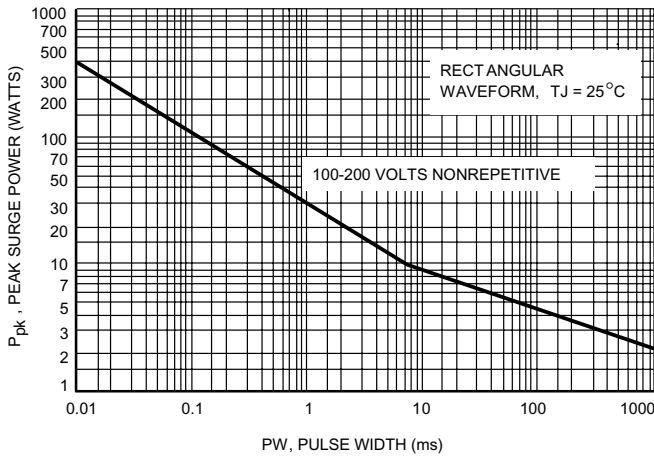


Figure 7b. Maximum Surge Power DO-35 100-200Volts

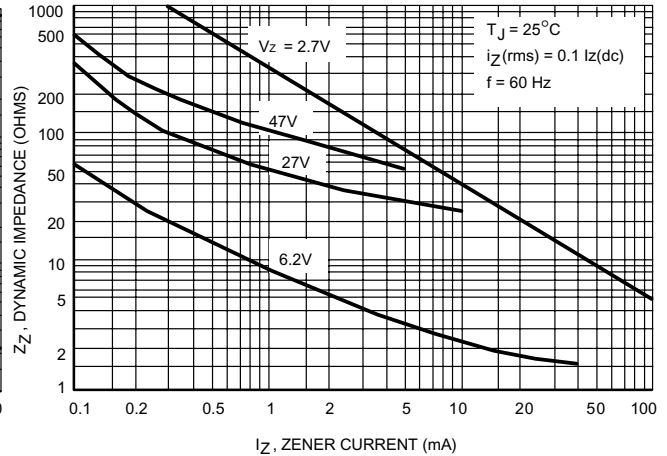


Figure 8. Effect of Zener Current on Zener Impedance

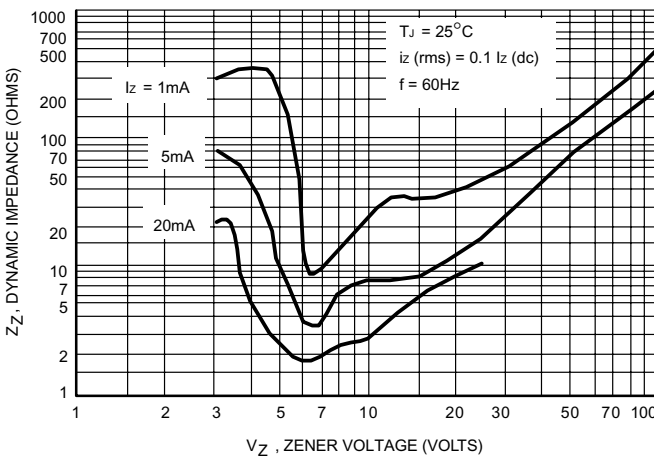


Figure 9. Effect of Zener Voltage on Zener Impedance

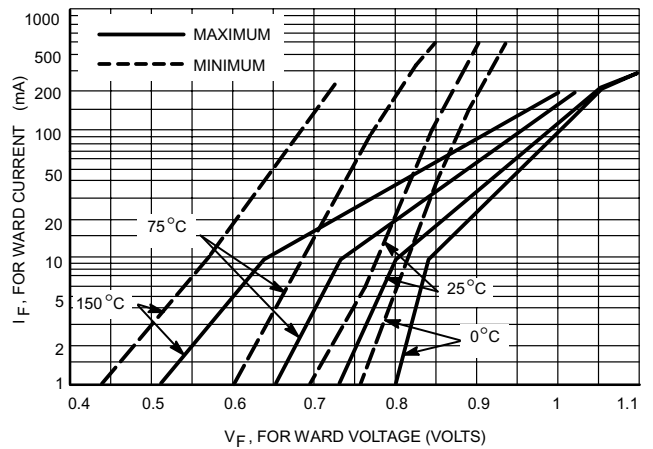


Figure 10. Typical Forward Characteristics

DEVICE CHARACTERISTICS

1N5985B~1N6025B

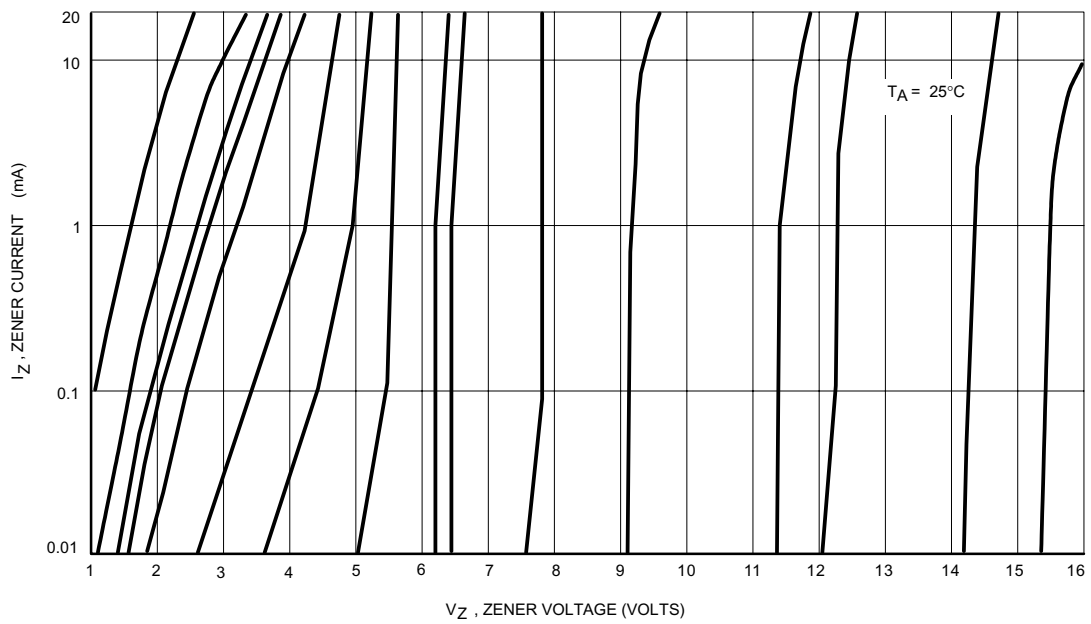


Figure 1 1. Zener Voltage versus Zener Current - $V_Z = 1$ thru 16 Volts

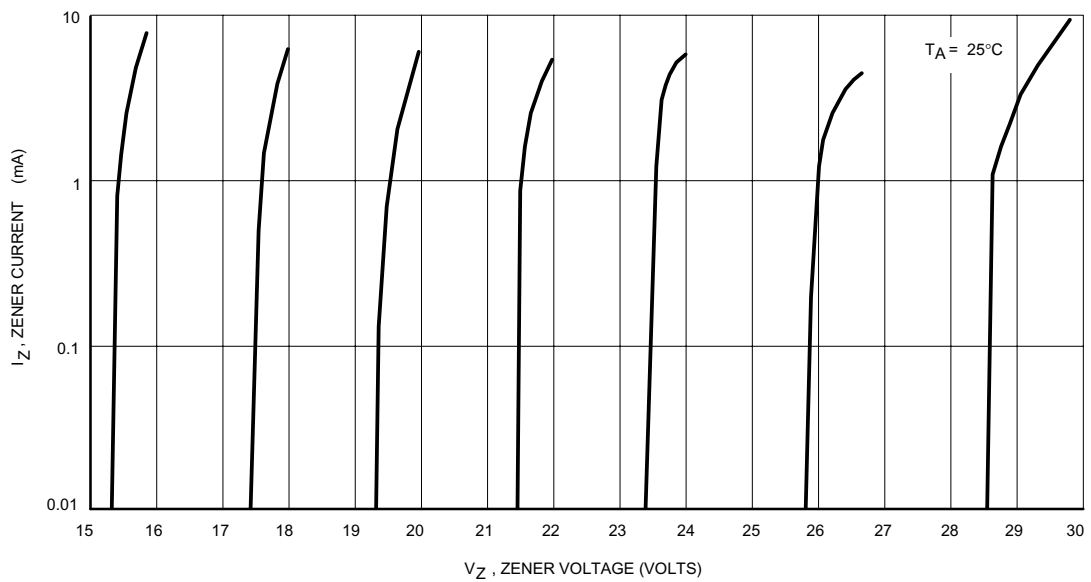


Figure 12. Zener Voltage versus Zener Current - $V_Z = 15$ thru 30 Volts

DEVICE CHARACTERISTICS

1N5985B~1N6025B

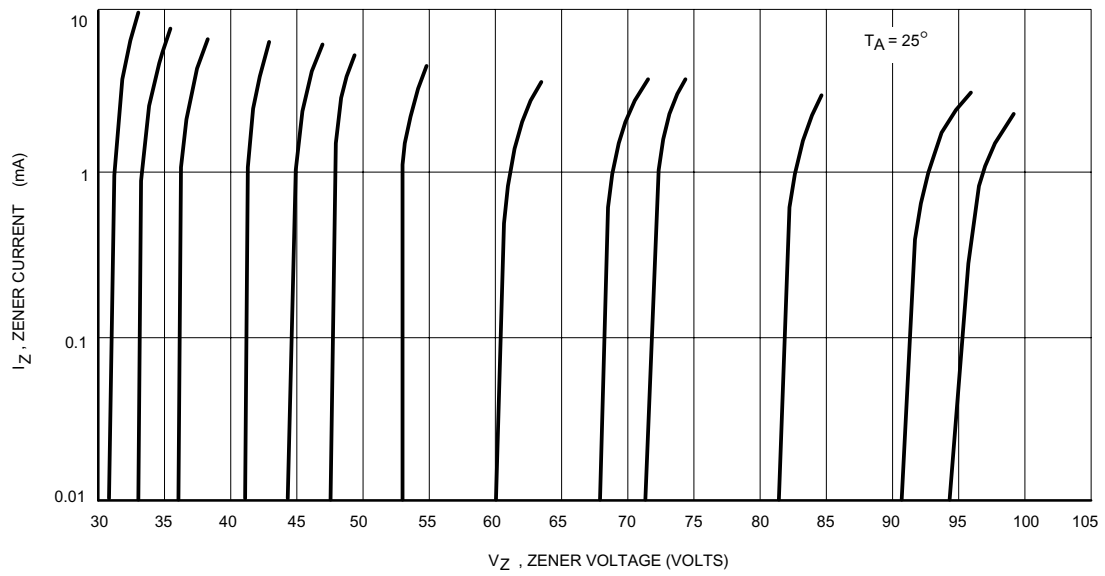


Figure 13. Zener Voltage versus Zener Current - $V_Z = 30$ thru 105 Volts

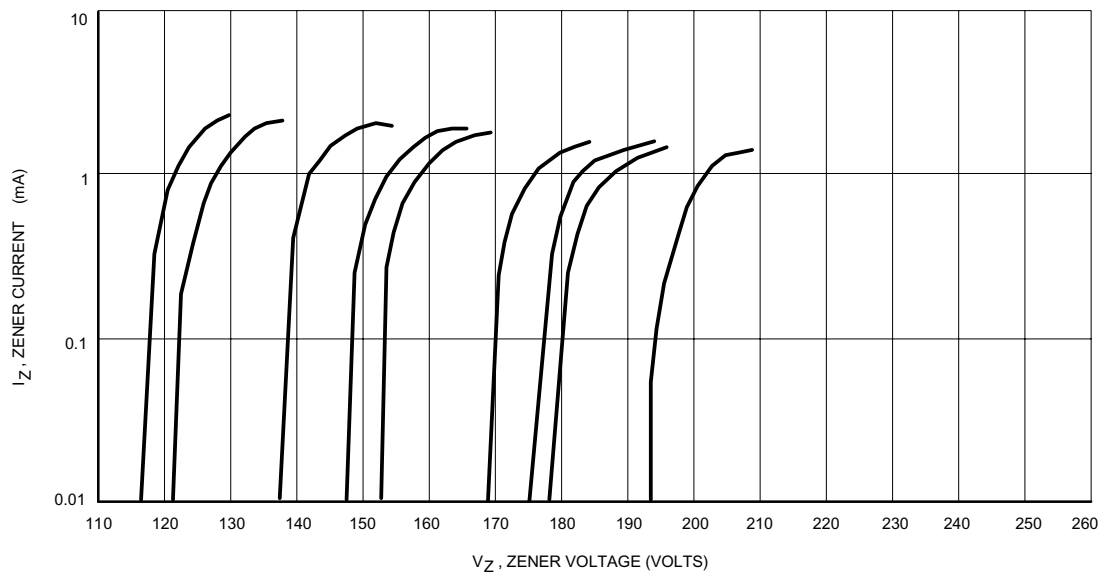
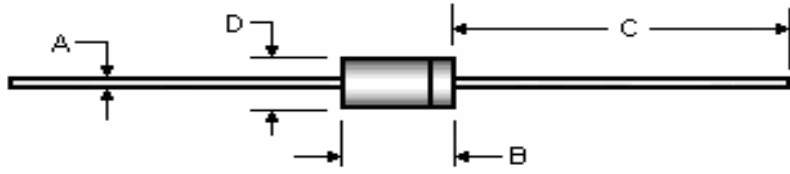


Figure 14. Zener Voltage versus Zener Current - $V_Z = 110$ thru 220 Volts

PACKAGE OUTLINE & DIMENSIONS

1N5985B~1N6025B

Package Outline

Package	Case Outline			
DO-35				
	DO-35			
DIM	Millimeters		Inches	
	Min	Max	Min	Max
A	0.46	0.55	0.018	0.022
B	3.05	5.08	0.120	0.200
C	25.40	38.10	1.000	1.500
D	1.53	2.28	0.060	0.090

Notes:

1. All dimensions are within JEDEC standard.
2. DO35 polarity denoted by cathode band.